

Expanded Metal Machine

The machines are used for punching shear cold crimped engine bed with the thickness of 0.4- 6mm, the width of 2000mm and material strength of 450N/mm².

Specifications:


If the TB and TL change, the punching shear knife change;

If TB and TL increase, the punching shear strength reduces:

If TB and TL reduce, the punching shear strength increases in order not to damage components.

The machines are used for punching all kinds of expand plate mesh in construction, such as, common hardware, window and door, machine protection, etc.



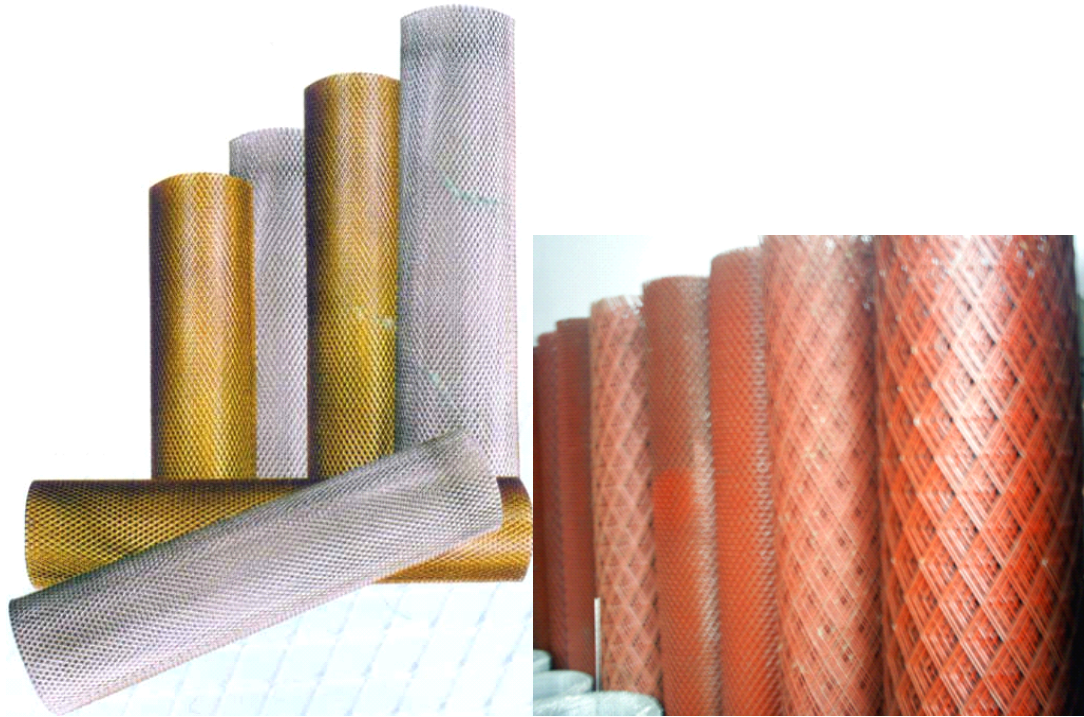

Main Parameter							
TYPE	YD25-6.3	YD25-16	YD25-25	YD25-63A	YD25-63B	YD25-160A	YD25-160B
DEPTH	=1.0mm	=1.0mm	=1.5mm	=2.5mm	=3mm	=6mm	=6mm
WIDTH	500mm	1000mm	1250mm	2000mm	2000mm	2500mm	2500mm
TIMES	180/min	150/min	150/min	70/min	45/min	70/min	20/min
DISTANCE	0-1.15mm	0-1.2mm	0-1.2mm	0-4mm	0-4mm	0-7mm	0-7mm
LENGTH OF MESH	=20mm	=25mm	=30mm	=100mm	=200mm	=250mm	=250mm
MOTOR	2.2KW	3KW	4KW	11KW	11KW	22KW	22KW
WEIGHT	0.95T	2T	3T	10T	10T	18T	20T
MEASUREMEENT	950 *570	1800	1940	2400	2400	5500 *1750	5500 *1750
	*1780	*1320	*1600	*3500	*3500	*3300	*3300
		*1550	*2010	*2300	*2300		

SERIES STRAIGHTER	TYPE	YDJ-05	YDJ-10	YDJ-125	YDJ-15	DEPTH=3MM
-------------------	------	--------	--------	---------	--------	-----------

AHJ

WIDTH

500mm

1000mm

1250mm

1500mm